


# 80 IG series

x80x38mm

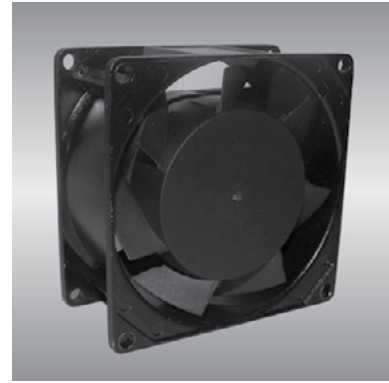

## General Specifications

- Motor : Shaded pole AC motor
- Frame & Impeller : Al Die-casting & PBT plastic
- Storage temperature : -40°C to +75°C
- Operating temperature : -10°C to +70°C

## Major Characteristic Parameters

Model	Bearing System	Rated Voltage	Freq.	Power Input	Rated Speed	Maximum Air Flow	Maximum Static Pressure	Sound Level	Weight		
Part NO.	B / S	V	Hz	W	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dBA	Kg
IGE08038_1H	B / S	110	50/60	13/10	2450/2950	0.74/0.88	26/31	4.3/6.0	0.17/0.24	29/30	0.37
IGE08038_2H	B / S	230	50/60	13/10	2450/2950	0.74/0.88	26/31	4.3/6.0	0.17/0.24	29/30	0.37

\*Bearing system B: Two Ball Bearing F: Fluid Bearing S: Sleeve Bearing

